


3
3/16" = 1'-0"

PROPOSED FLOOR PLAN (8TH FLOOR)

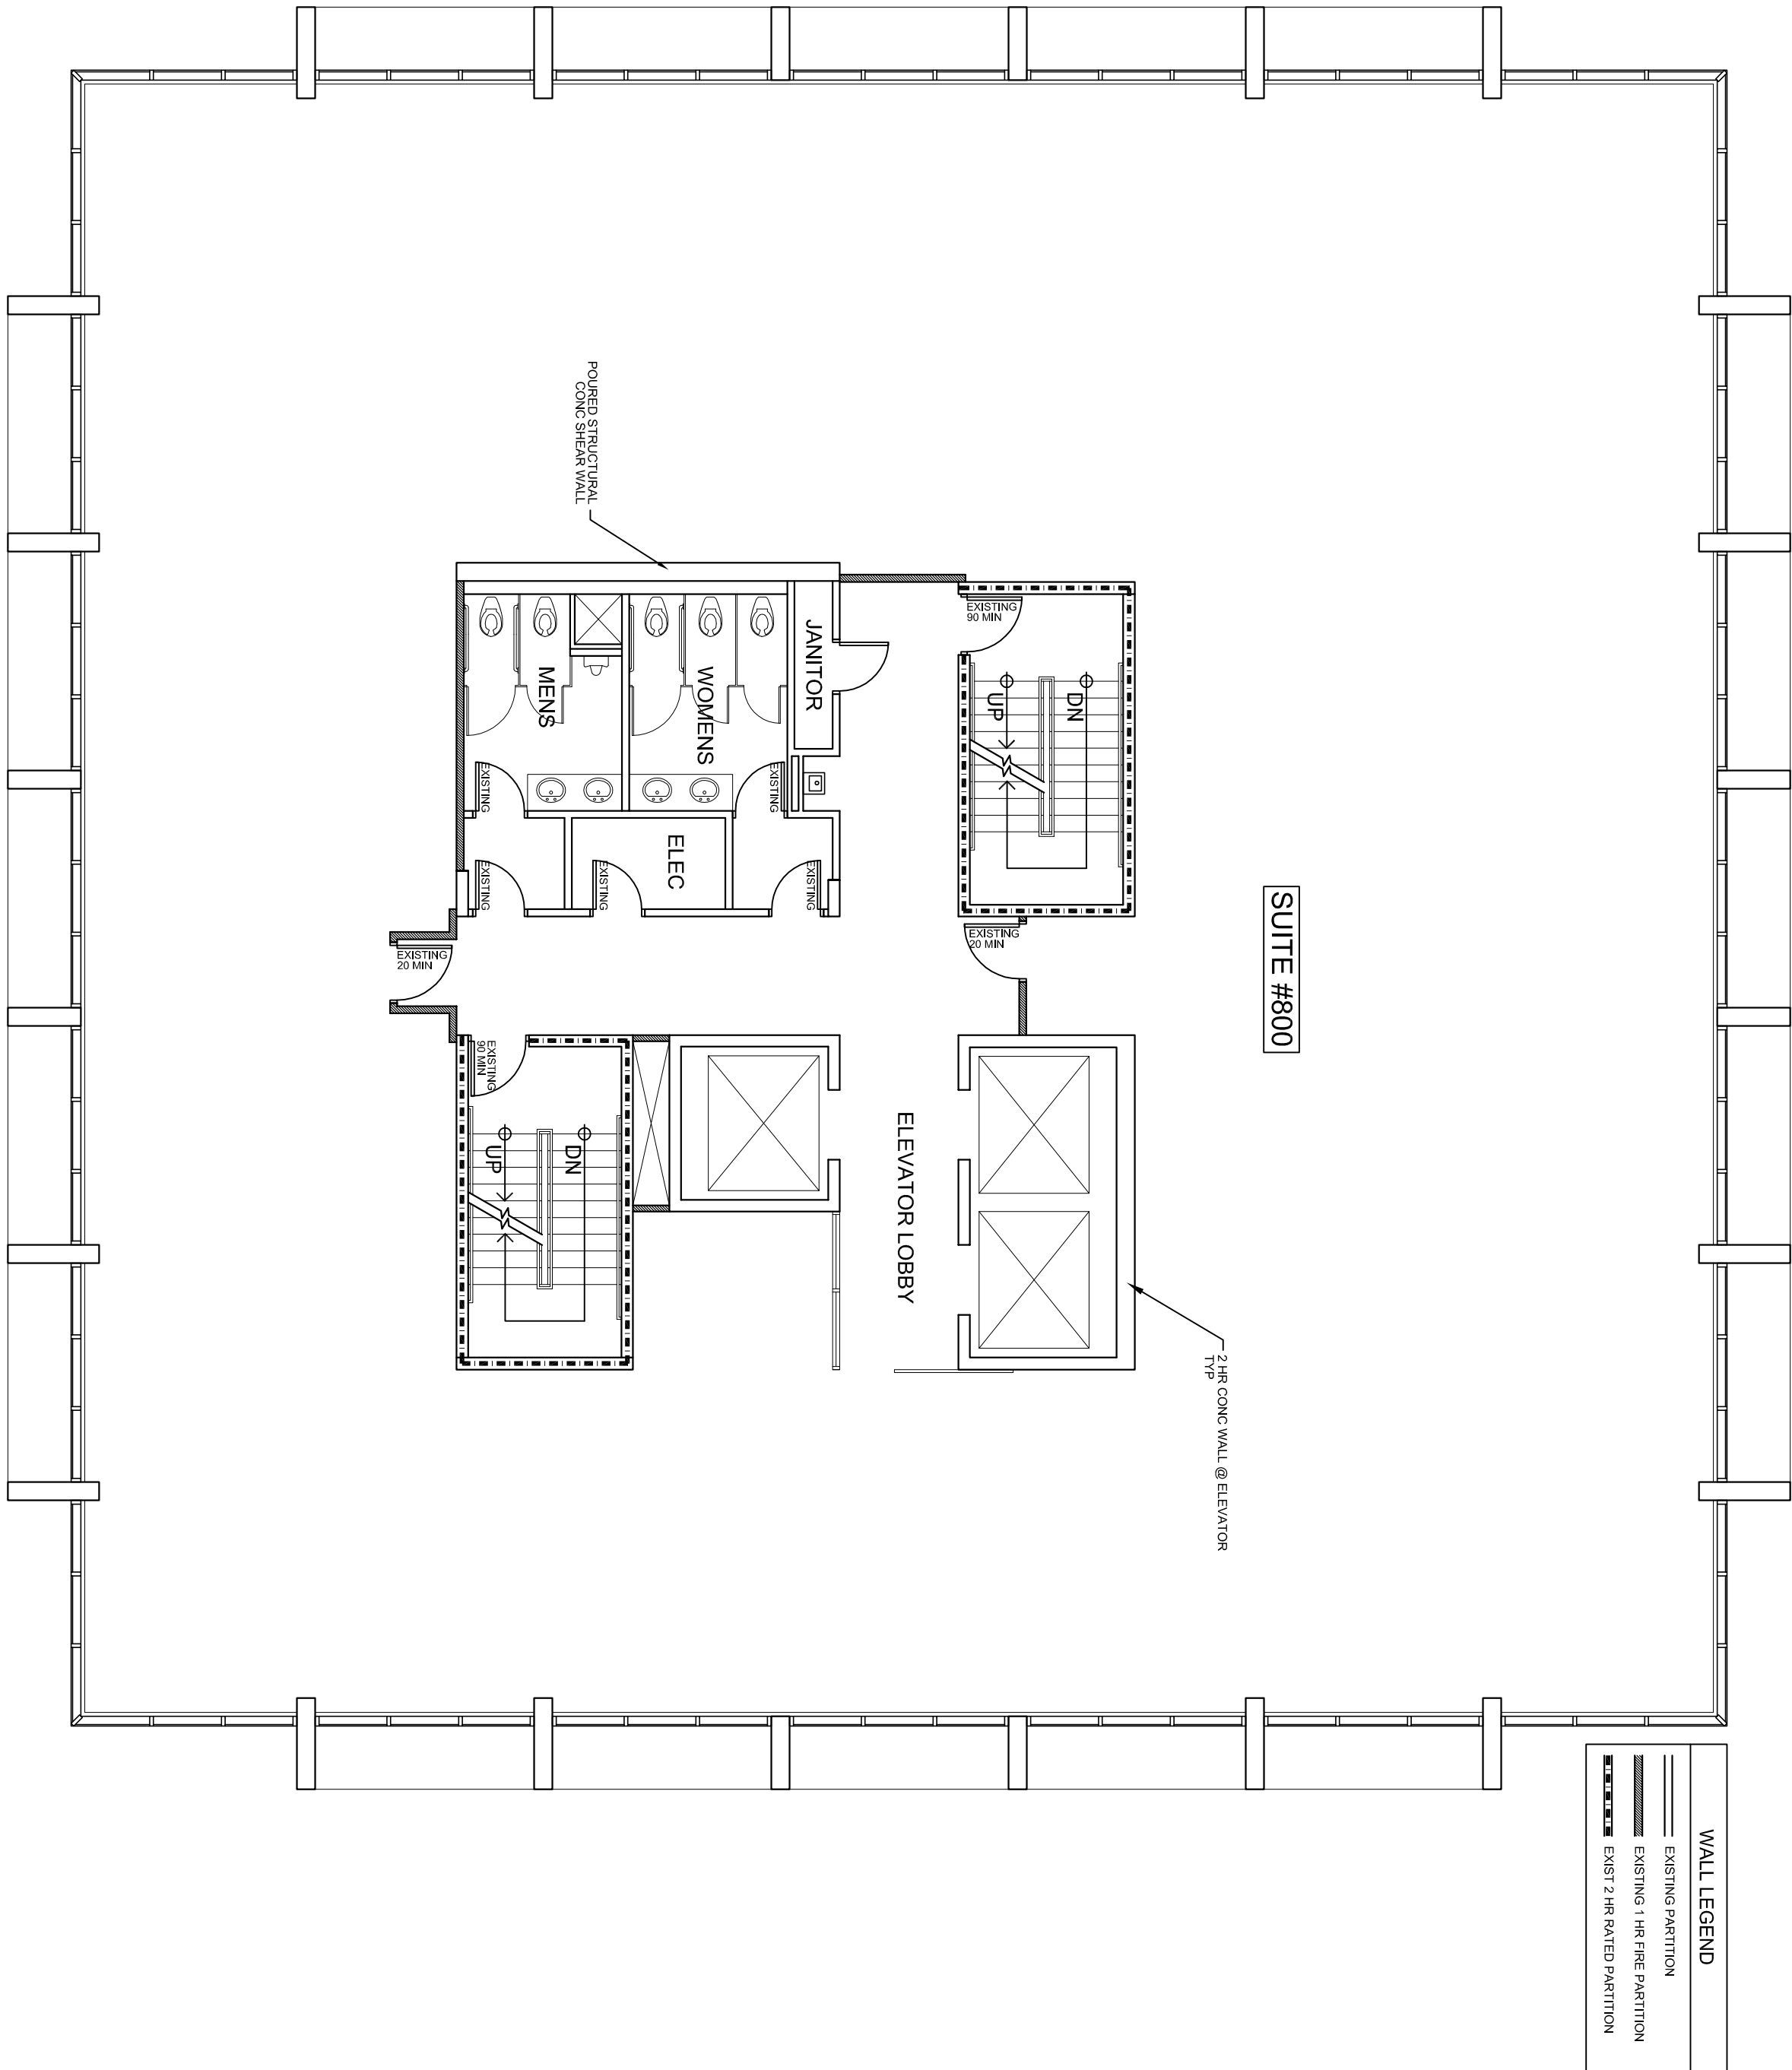

- STRUCTURES UNDERGOING CONSTRUCTION, ALTERATION OR DEMOLITION SHALL COMPLY WITH NFPA 241
- ACCUMULATIONS OF COMBUSTIBLE WASTE AND DUST DEBRIS SHALL BE REMOVED FROM COMMON AREAS AND CORRIDORS AS NECESSARY TO MAINTAIN CLEAR EGRESS AND FREQUENTLY AS NECESSARY FOR SAFE OPERATIONS
- EXIT AND ACCESS CORRIDORS ARE TO BE MAINTAINED AND REMAIN CLEAR AND UNOBSTRUCTED
- THE MAIN BUILDINGS FIRE PROTECTION SYSTEMS SHALL BE MAINTAINED AND OPERATIONAL AT ALL TIMES
- IN THE EVENT THAT THE FIRE PROTECTION SYSTEM IS OUT OF SERVICE FOR MORE THAN 4 HOURS IN A 24 HOUR PERIOD, THE BUILDING SHALL BE PLACED ON A FIRE WATCH

1
1/8" = 1'-0"

EXISTING FLOOR PLAN (8TH FLOOR)

1. ALL WALL DOORS ARE EXISTING AS PER EXISTING FLOOR PLAN 1/A-1
2. ALL PLUMBING/MECHANICAL WORK IS EXISTING AS PER EXISTING FLOOR PLAN 1/A-1
3. TOILET ROOMS ARE EXISTING IN COMMON AREA CORRIDOR AS PER FLOOR PLAN 1/A-1
4. DRINKING FOUNTAIN IS EXISTING IN COMMON AREA CORRIDOR AS PER FLOOR PLAN 1/A-1

COMMON CORRIDOR DEMO NOTES

1. DEMO EXISTING SUSPENDED CEILING SYSTEM AND ALL EXISTING LIGHTS. CAP ALL WIRING AT JUNCTION BOX. REMOVE ALL SCONES FROM WALL. WIRING TO REMAIN
 2. REMOVE ALL WALL COVERING AND FLOOR COVERING. REMOVE ALL WOOD BASE
 3. REMOVE ALL EXISTING LIFE SAFETY DEVICES
- RESTROOM DEMO NOTES
1. DEMO ALL EXISTING WALL COVERING/TILE
 2. DEMO ALL EXISTING FLOOR TILE
- EXISTING SUSPENDED CEILING AND ALL EXISTING LIGHTS. DEMO LIGHTING SPLIT ABOVE TOILET
4. DEMO ALL EXISTING TOILET PARTITIONS
 5. DEMO ALL EXISTING COUNTERS/SINKS/MIRRORS/FIXTURES
 6. WALL MOUNT/CABINETS/SPRINKLER TO REMAIN AS EXISTING


COMMON CORRIDOR PROPOSED NOTES

1. PROVIDE NEW BUILDING STANDARD TILE THROUGHOUT ELEVATOR LOBBY AND CORRIDORS
2. PROVIDE BUILDING STANDARD WALL COVERING THROUGHOUT ELEVATOR LOBBY AND CORRIDORS
3. PROVIDE NEW BUILDING STANDARD SUSPENDED CEILING SYSTEM AND LIGHTS AS PER PROPOSED CEILING PLAN 4-A.1 (BOTH COMMON AREAS AND RESTROOMS) PAINT HEADERS WHITE
4. TOUCH-UP AND STAIN EXISTING DOORS AND PROVIDE NEW HARDWARE AS PER EXISTING DOOR SCHEDULE. BUILDING STANDARD DOORS STAIN TO MATCH 3RD FLOOR AND NEW BUILDING CONTRACTOR TO PROVIDE UNIT PRICING TO REPLACE ALL BUILDING STANDARD 2'-0" X 8'-0" DOORS/FRAMES. NEW DOORS TO BE SOLID CORE STAIN GRADE W/ Mtl FRAME
5. PROVIDE NEW BUILDING STANDARD WALL COVERING THROUGHOUT ELEVATOR LOBBY AND CORRIDOR
6. EXISTING WALL SCONE TO BE REPLACED WITH NEW
7. PROVIDE ALL NEW BUILDING STANDARD LIFE SAFETY DEVICES
8. EXISTING OVERTIME AIR SWITCH TO BE REPLACED WITH NEW
9. SEE SHEET 1/A-6 FOR RESTROOM NOTES/DETAILS. DRINKING FOUNTAIN TO REMAIN AS EXISTING

EXISTING DOOR SCHEDULE		
#	SIZE	NOTES
A	25"x 65"	PAINT DOOR / NEW HARDWARE
B	35"x 65"	RESTAURANT DOOR / NEW HARDWARE
C	25"x 65"	PAINT DOOR / NEW HARDWARE
D	35"x 65"	PAINT DOOR / NEW HARDWARE
E	25"x 65"	PAINT DOOR / NEW HARDWARE
F	25"x 65"	PAINT DOOR / NEW HARDWARE
G	25"x 65"	PAINT DOOR / NEW HARDWARE
H	25"x 65"	PAINT DOOR / NEW HARDWARE
I	25"x 65"	PAINT DOOR / NEW HARDWARE
J	25"x 65"	PAINT DOOR / NEW HARDWARE
K	25"x 65"	SLIDING DOOR TO REMAIN

4
3/16" = 1'-0"

PROPOSED CEILING PLAN (8TH FLOOR)

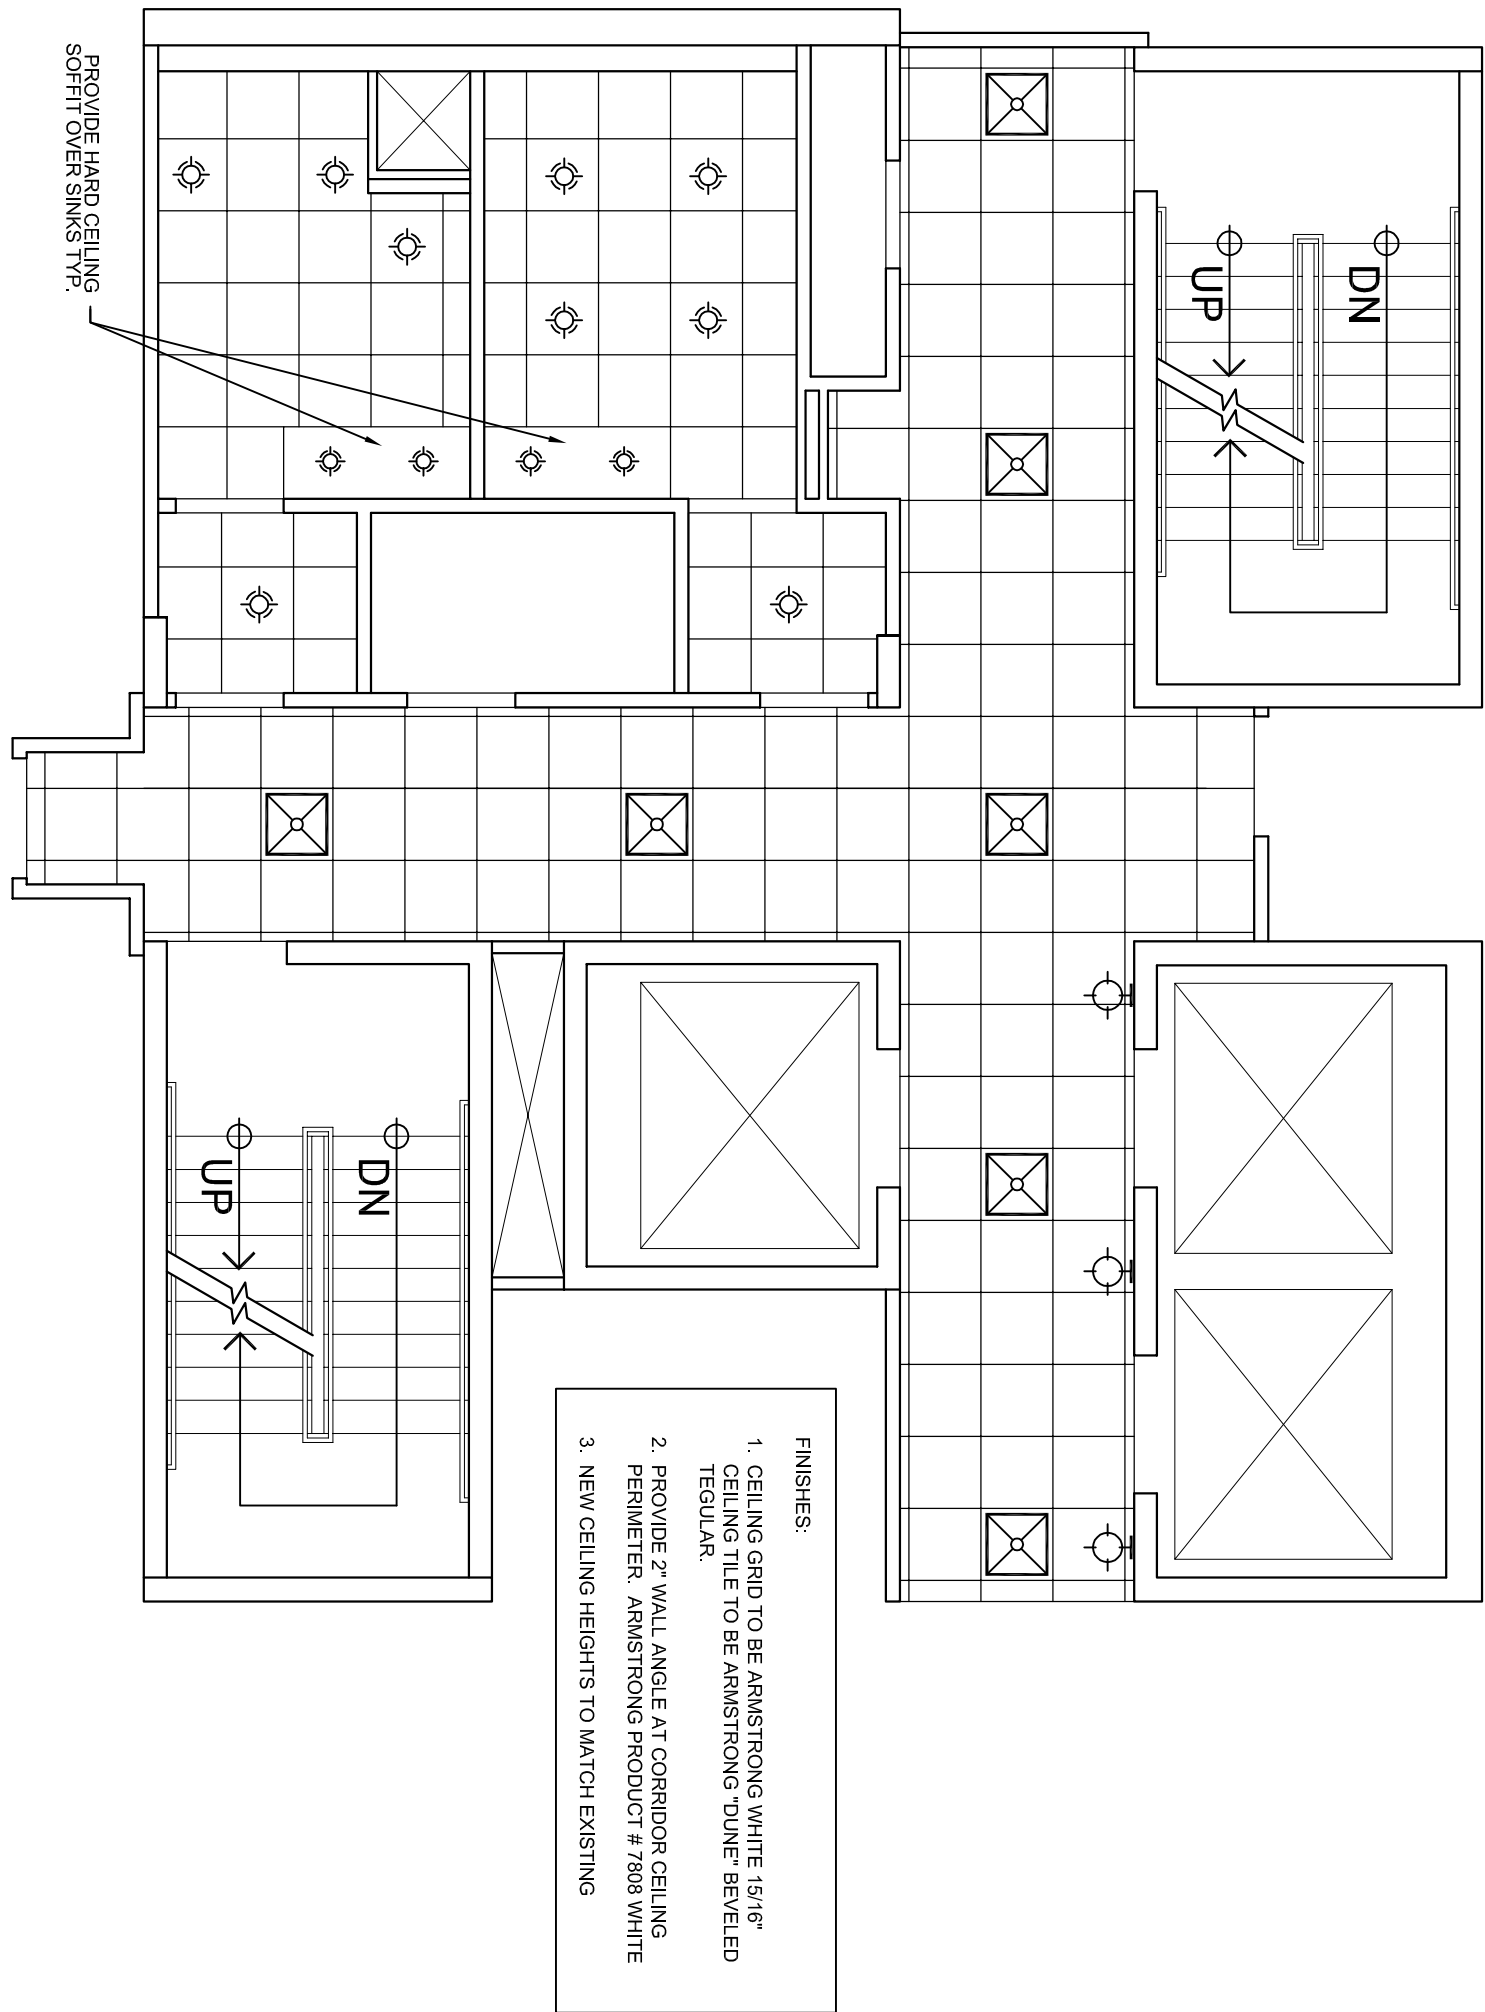

4
3/16" = 1'-0"

PROPOSED CEILING PLAN (8TH FLOOR)